

M326R Direct Fix hanger
High performance resilient ceiling hanger that meets the static deflection code.



M581 Resilient channel
Efficient low-cost method developed to reduce transmission of airborne sound.



M50R Ceiling Isolation hanger
Three variants available with load capacities of 29kg, 54kg and 91kg.



M239R Adjustable Furring Channel Resilient mount
Fully adjustable furring channel clip that has sound isolation fixing.



M319R Static Deflection Ceiling Bracket
Slimceil Ceiling System, meets the static deflection criteria.




M24R Resilient joiner bracket
Sound isolation brace that can be used in chase wall applications.

SOUND ISOLATION SYSTEMS




SOUND ISOLATION SYSTEMS

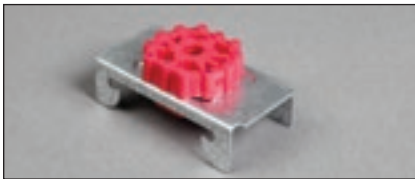

RESILIENT MOUNTS		Sub pack	Stock pack	Approx kg/pce
M237R	Furring Channel Resilient Mount - Direct Fixing	100	100	0.03




RESILIENT MOUNTS		Sub pack	Stock pack	Approx kg/pce
M237TR	Furring Channel to Top Cross Rail Resilient Mount	50	50	0.08

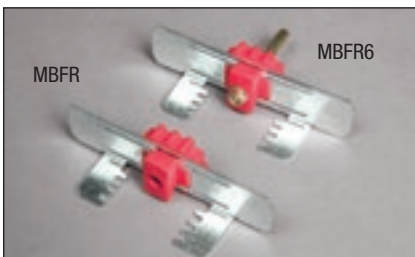

RESILIENT MOUNTS		Sub pack	Stock pack	Approx kg/pce
MBFR	Resilimount Adjustable Direct Fix Clip	100	100	0.05
MBFR6	Resilimount Adj Direct Fix Clip - 6.5ø Bolt	100	100	0.06



RESILIENT MOUNTS		Sub pack	Stock pack	Approx kg/pce
M24R	Resilient Joiner Bracket	30	30	0.06

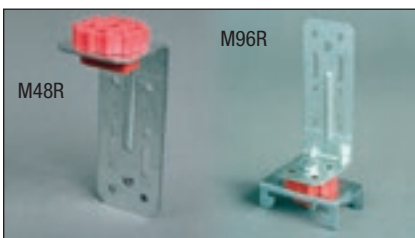

RESILIENT MOUNTS		Sub pack	Stock pack	Approx kg/pce
M48R	Right Angle Resilient Mount Bracket	100	100	0.07
M96R	Furring Channel to Purlin Resilient Mount	50	50	0.09



RESILIENT MOUNTS		Sub pack	Stock pack	Approx kg/pce
M239R-85	Resilimount Adjustable Direct Fix Clip - 85mm	100	100	0.10
M239R-120	Resilimount Adjustable Direct Fix Clip - 120mm	100	100	0.10
M239R-150	Resilimount Adjustable Direct Fix Clip - 150mm	100	100	0.10




RESILIENT MOUNTS		Sub pack	Stock pack	Approx kg/pce
M50R-BLK	Isolation Hanger BLACK - 50KG	100	100	0.04
M50R-BLU	Isolation Hanger BLUE - 91KG	100	100	0.04
M50R-RED	Isolation Hanger RED - 40KG	100	100	0.04

Lead time and minimum quantities may apply

SOUND ISOLATION SYSTEMS



Part No.	RESILIENT MOUNTS	Sub pack	Stock pack	Approx kg/pce
RM07	Rubber Impact Mats 40 x 41mm	100	100	0.01
RN5	Rubber Nut for Fixing Isolation #	100	100	0.01

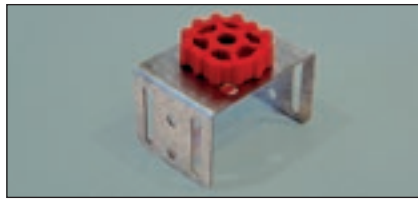

Part No.	SLIMCEIL RESILIENT MOUNTS	Length mm.	Sub pack	Stock pack	Approx kg/pce
M324R-2	Resilmount Slimceil Bracket 47 - 70mm	47-70*	50	50	0.03
M324R-4	Resilmount Slimceil Bracket 63 - 86mm	63-86*	50	50	0.03
M324R-6	Resilmount Slimceil Bracket 79 - 102mm	79-102*	50	5	0.03
M324R-8	Resilmount Slimceil Bracket 95 - 118mm	95-118*	50	5	0.03

* This is the distance between the concrete substrate and the back face of the plasterboard lining. Example: for a 85mm overall ceiling cavity using one layer of 13mm plasterboard, use a M324R-4 Ceiling Bracket (85mm - 13mm = 72mm [bracket is adjustable 53-76mm]).



Part No.	SLIMCEIL RESILIENT MOUNTS	Length mm.	Sub pack	Stock pack	Approx kg/pce
<i>Use with Slimceil channel on page 13 - meets BCA2012 static deflection criteria.</i>					
M319R-4	Static Deflection Ceiling Bracket	62-84*	50	50	0.20
M319R-6	Static Deflection Ceiling Bracket	76-98*	50	50	0.20
M319R-8	Static Deflection Ceiling Bracket	90-112*	50	50	0.20
M319R-10	Static Deflection Ceiling Bracket	104-126*	50	50	0.20
M319R-12	Static Deflection Ceiling Bracket	118-140*	50	50	0.20
M319R-14	Static Deflection Ceiling Bracket	132-154*	50	50	0.20
M319R-16	Static Deflection Ceiling Bracket	146-168*	50	50	0.20
M319R-18	Static Deflection Ceiling Bracket	160-182*	50	50	0.20
M319R-20	Static Deflection Ceiling Bracket	174-196*	50	50	0.20



Part No.	RESILIENT CHANNEL	Length mm.	Sub pack	Stock pack	Approx kg/pce
M581	Resilmount Resilient Channel	3658	1	100	0.99



Part No.	RESILIENT MOUNTS	Sub pack	Stock pack	Approx kg/pce
M326R-RED	Resilmount static deflection direct-fix resilient hanger 21-46kg RED#	50	50	0.30
M326R-PUR	Resilmount static deflection direct-fix resilient hanger 40-79kg PURPLE#	50	50	0.30

Lead time and minimum quantities may apply

Sound Isolation Solutions For Ceilings



Resilmount – Australia’s most affordable solution for guaranteed performance in acoustic walls and ceilings.

When reducing airborne vibration and structure-borne vibration in wall and ceiling applications, the new Resilmount M239R and M326R are your solution for adjustable Direct Fixing Furring Channel Resilmount Mounts. Both Resilmount’s are engineered, patented acoustic resilient mounting bracket for Studco furring channels.



M326R

M326R MEETS STATIC DEFLECTION CODE




M239R

NEW



1800 STUDCO
WWW.STUDCOSYSTEMS.COM.AU



Available at a store near you



Complex Seismic Compliance Made Simple With Studco

Studco has a long, successful history of creating economical engineered building systems for earthquake resistant buildings in Australia, New Zealand and USA.



Engineering solutions for...

- External structural walls
- Internal partition walls
- Seismic constructions
- Ceiling systems
- Acoustic control...and more


Services available...

- Engineering designs
- Certified documentation
- BIM & CAD modeling
- Qualified acoustic opinions
- Reports & site inspections
- Project warranties


Recent Seismic Designs...

- Blacktown Hospital, NSW
- Perth Childrens Hospital, WA
- Albury Cancer Centre, NSW
- VCCC, Vic
- CWM Hospital, Fiji

Need some technical advice? Call 1800 STUDCO or email us at tech.advice@studcosystems.com.au



1800 STUDCO
WWW.STUDCOSYSTEMS.COM.AU



Available at a store near you

